
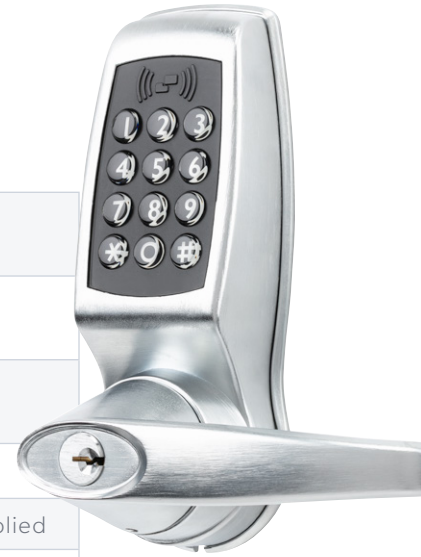
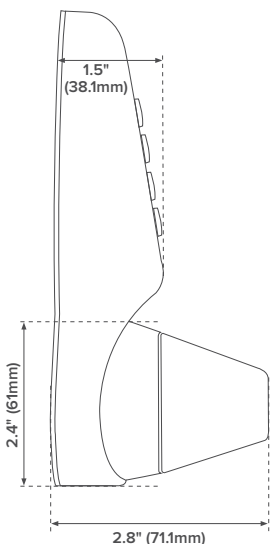
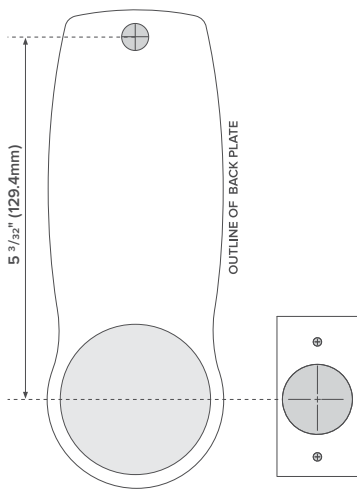


# 4500 SERIES

## Mechanical Specifications

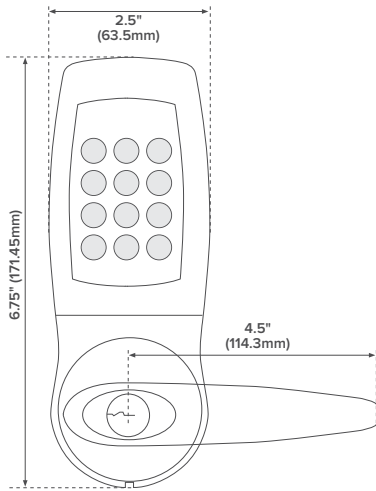

<b>Environment:</b>	Lighter duty, internal use or protected external use
<b>Exterior Dimensions:</b>	6 ¾ (H) x 2 ½ (W) x 2 ¾ (D) in.
<b>Interior Dimensions:</b>	6 ¾ (H) x 2 ½ (W) x 2 ¾ (D) in.
<b>Weight:</b>	5.75 lbs.
<b>Backset:</b>	2 ⅜ in. (60mm) and 2 ¾ in. (70mm) supplied
<b>Locking Devices:</b>	Tubular latch included, Mortise latch available
<b>Mortise Door Prep:</b>	Standard ANSI 115.1 Mortise prep (86 cutout), modified with added through-bolt holes.
<b>Tubular Latch Door Prep:</b>	Standard ANSI A115.2 (160 and 161 cutouts)
<b>Strike:</b>	2 ¾" (for 1 ⅜" door) and 4 ⅞" (for 1 ¾" door) supplied
<b>Construction:</b>	Zinc Alloy with PVD (Physical Vapor Deposition) finish
<b>Door Thickness:</b>	1 ⅜ – 2 ⅜ in. (35mm – 60mm)
<b>Door Handing:</b>	Non-handed, field reversible
<b>Batteries:</b>	AA (Not Included)
<b>Warranty:</b>	2 years mechanical, 1 year electrical
<b>Finishes:</b>	Satin Chrome
<b>Cylinder and Keys:</b>	Removable 5-pin Schlage C (SC1 key)
<b>Cylinder and Keys:</b>	Removable 6-pin Schlage C core standard (SC4 key), SFIC core available

### Locking Device Options

#### TUBULAR



#### MORTISE



2 ⅜" (60mm) and  
2 ¾" (70mm) latch