
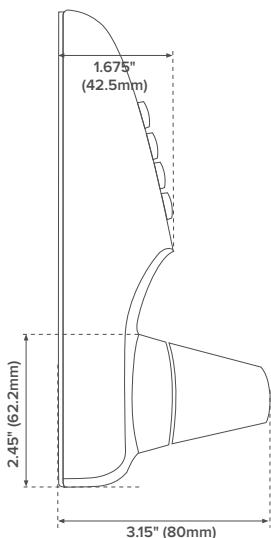
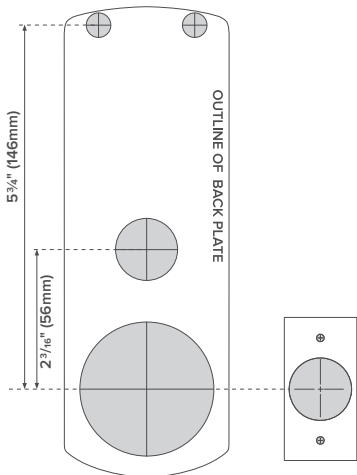
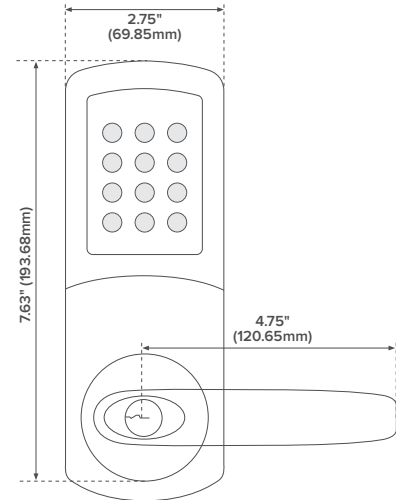


# 5200 SERIES

## Mechanical Specifications

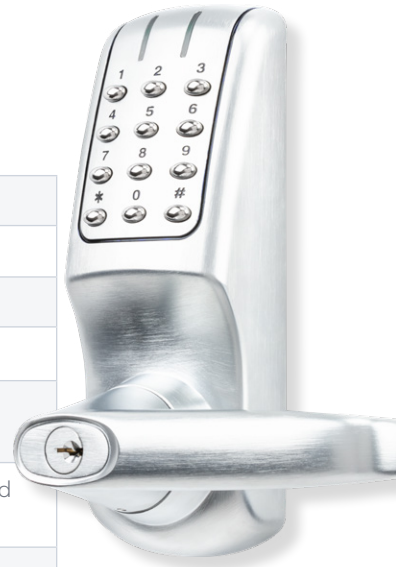

<b>Environment:</b>	For normal internal and external use
<b>Exterior Dimensions:</b>	7 5/8 (H) x 2 3/4 (W) x 2 3/4 (D) in.
<b>Interior Dimensions:</b>	7 5/8 (H) x 2 3/4 (W) x 2 3/4 (D) in.
<b>Weight:</b>	7.90 lbs.
<b>Backset:</b>	2 3/8 in. (60mm) and 2 3/4 in. (70mm) supplied
<b>Locking Devices:</b>	Available with cylindrical, exit trim, and mortise options
<b>Mortise Door Prep:</b>	Standard ANSI 115.1 Mortise prep (86 cutout), modified with added through-bolt holes.
<b>Tubular Latch Door Prep:</b>	Standard ANSI A115.2 (160 and 161 cutouts)
<b>Strike:</b>	2 3/4" (for 1 3/8" door) and 4 7/8" (for 1 3/4" door) supplied
<b>Construction:</b>	Zinc Alloy, suitable for indoor & outdoor use
<b>Door Thickness:</b>	1 3/8 – 2 3/8 in. (35mm – 60mm)
<b>Door Handing:</b>	Non-handed, field reversible
<b>Batteries:</b>	4 AA (Not Included)
<b>Certifications:</b>	ANSI/BHMA A156.25-2018, Grade 2, ANSI/BHMA A156.2-2017
<b>Warranty:</b>	1 year
<b>Finishes:</b>	Satin Chrome, Matte Black
<b>Cylinder and Keys:</b>	Removable 6-pin Schlage C core standard (SC4 key), SFIC core available

### Locking Device Options

#### TUBULAR



2 3/8" (60mm) and  
2 3/4" (70mm) latch

#### MORTISE



#### EXIT BAR CONTROL

