
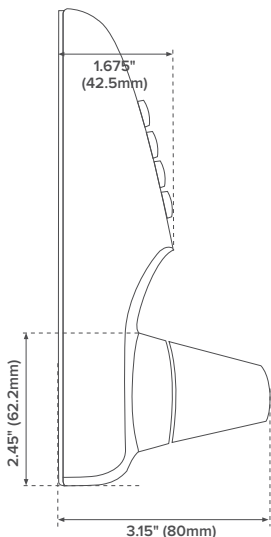
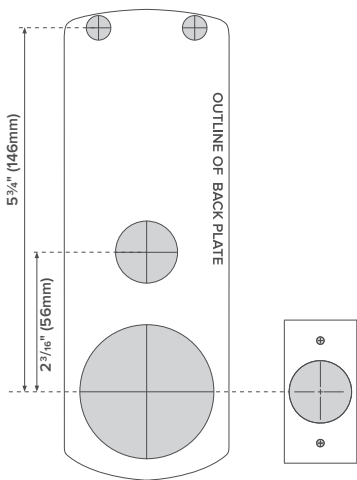
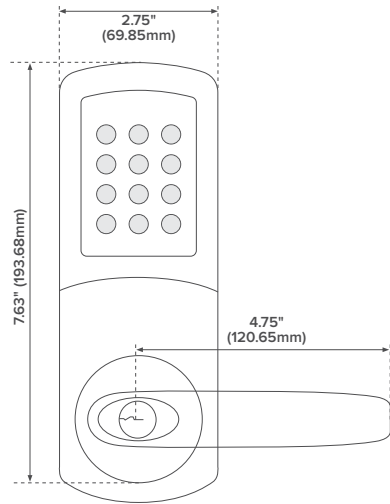


5500 SERIES


Mechanical Specifications

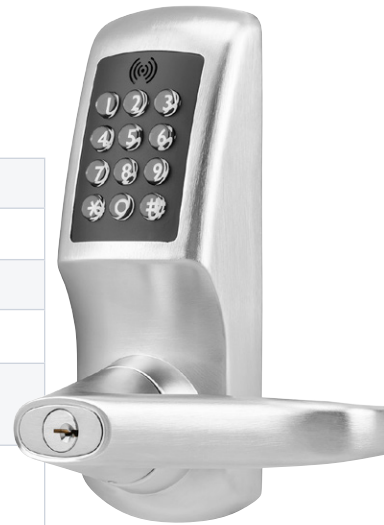

Environment:	For normal internal and external use
Exterior Dimensions:	7 5/8 (H) x 2 3/4 (W) x 2 3/4 (D) in.
Interior Dimensions:	7 5/8 (H) x 2 3/4 (W) x 2 3/4 (D) in.
Weight:	7.90 lbs.
Backset:	2 3/8 in. (60mm) and 2 3/4 in. (70mm) supplied
Locking Devices:	Available with cylindrical, exit trim, and mortise options
Mortise Door Prep:	Standard ANSI 115.1 Mortise prep (86 cutout), modified with added through-bolt holes.
Tubular Latch Door Prep:	Standard ANSI A115.2 (160 and 161 cutouts)
Strike:	2 3/4" (for 1 3/8" door) and 4 7/8" (for 1 3/4" door) supplied
Construction:	Zinc Alloy, suitable for indoor & outdoor use
Door Thickness:	1 3/8 – 2 3/8 in. (35mm – 60mm)
Door Handing:	Non-handed, field reversible
Batteries:	4 AA (Not Included)
Certifications:	ANSI/BHMA A156.25-2018, Grade 2, ANSI/BHMA A156.2-2017
Warranty:	2 years mechanical, 1 year electrical
Finishes:	Satin Chrome, Matte Black
Cylinder and Keys:	Removable 6-pin Schlage C core standard (SC4 key), SFIC core available

Locking Device Options

TUBULAR



2 3/8" (60mm) and
2 3/4" (70mm) latch

MORTISE



EXIT BAR CONTROL

