4500 SERIES
Mechanical Specifications

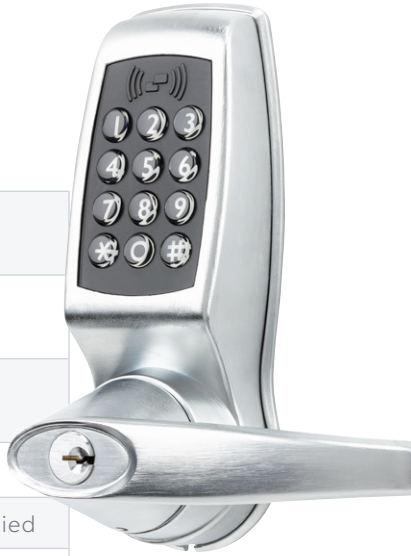

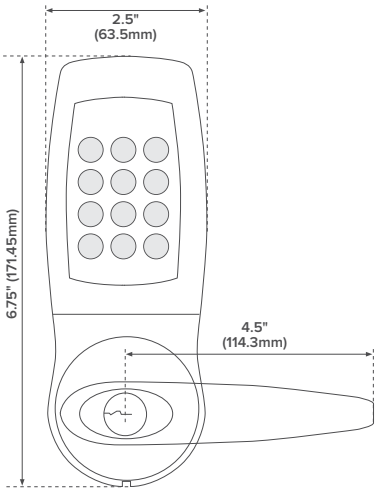

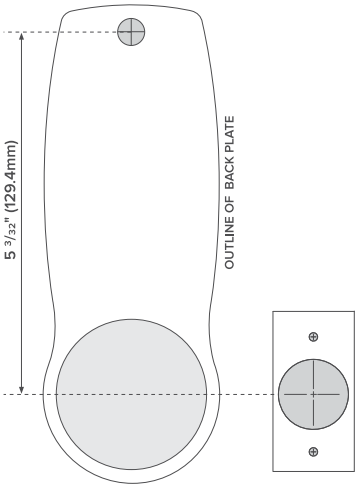

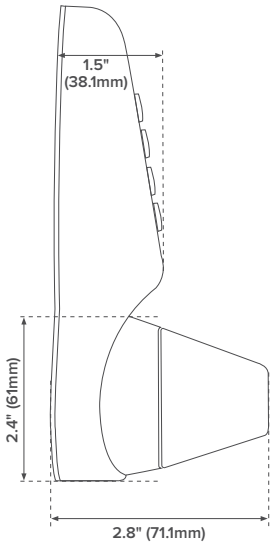

Environment:	Lighter duty, internal use or protected external use
Exterior Dimensions:	6 ¾ (H) x 2 ½ (W) x 2 ¾ (D) in.
Interior Dimensions:	6 ¾ (H) x 2 ½ (W) x 2 ¾ (D) in.
Weight:	5.75 lbs.
Backset:	2 ⅜ in. (60mm) and 2 ¾ in. (70mm) supplied
Locking Devices:	Tubular latch included, Mortise latch available
Mortise Door Prep:	Standard ANSI 115.1 Mortise prep (86 cutout), modified with added through-bolt holes.
Tubular Latch Door Prep:	Standard ANSI A115.2 (160 and 161 cutouts)
Strike:	2 ¾" (for 1 ⅜" door) and 4 ⅞" (for 1 ¾" door) supplied
Construction:	Zinc Alloy with PVD (Physical Vapor Deposition) finish
Door Thickness:	1 ⅜ – 2 ⅜ in. (35mm – 60mm)
Door Handing:	Non-handed, field reversible
Batteries:	AA (Not Included)
Warranty:	1 year
Finishes:	Satin Chrome
Cylinder and Keys:	Removable 5-pin Schlage C (SC1 key)

Locking Device Options

TUBULAR



2 ⅜" (60mm) and
2 ¾" (70mm) latch

MORTISE